FUNDAMENTALS of Engineering Examination 2026

Information for Applicants



professional engineers board Singapore 52 Jurong Gateway Road #07-03 Singapore 608550

Professional Engineers Registration Examination Fundamentals of Engineering Examination 2026

Information for Applicants

Content

1	Introduction	. 2
2	Eligibility To Sit For Examination	. 2
3	Fees	. 2
4	Dates Of Examination	. 3
5	Venue	. 3
6	Application	. 3
7	Structure Of Examination	. 3
8	Final Results and Notification	
9	Examination Appeals	.4
10	Review Courses	.4
11	Refund Of Fees	.4
12	Request for Accommodation	.4

Annex A: FORMAT AND SYLLABUS, READING LISTS AND QUESTIONS FROM PAST YEAR PAPERS

Ι	Fundamentals Of Engineering Examination (Civil)5 Recommended Reading List (Civil) Questions From Past Year Papers (Civil)
II	Fundamentals Of Engineering Examination (Electrical)23 Recommended Reading List (Electrical) Questions From Past Year Papers (Electrical)
III	Fundamentals Of Engineering Examination (Mechanical)
IV	Fundamentals of Engineering Examination (Chemical)

Professional Engineers Registration Examination Fundamentals of Engineering Examination 2026 Information for Applicants

1 INTRODUCTION

The mission of the Professional Engineers Board is to safeguard life, property, and welfare of the public by setting and maintaining high standards for registering professional engineers and by regulating and advancing the practice of professional engineering.

The Professional Engineers Board registers professional engineers in the branches of civil, electrical, mechanical and chemical engineering. A person applying for registration as a professional engineer to the Professional Engineers Board is required to hold an approved degree or qualification listed in the <u>Professional Engineers</u> (Approved Qualifications) Notification 2009 and acquired not less than 4 years of relevant practical experience. He is also required to sit and pass examinations prescribed by the Board. The applicant is required to sit and pass the Fundamentals of Engineering Examination and following that, to sit and pass the Practice of Professional Engineering Examination. In addition, the applicant is required to attend an interview.

The following sections set out the requirements and details for the Fundamentals of Engineering Examination 2026 while details on other application requirements are available on the PEB website at <u>www.peb.gov.sg</u>.

2 ELIGIBILITY TO SIT FOR EXAMINATION

The Fundamentals of Engineering Examination tests an applicant's knowledge of fundamental engineering subjects in civil, electrical, mechanical or chemical engineering. A person may apply to sit for the Fundamentals of Engineering Examination if he is undertaking a full time undergraduate engineering degree programme of not less than 4 years, or an equivalent programme approved by the Board, and is in his final year of study or after he has obtained an approved degree or qualification listed in the <u>Professional Engineers (Approved Qualifications)</u> Notification 2009 or has proper and recognised academic qualifications in engineering accepted by the Board.

3 FEES

The fees for an application to sit for the Fundamentals of Engineering Examination is \$350.

4 DATES OF EXAMINATION

The dates for the Fundamentals of Engineering Examination 2026 are:

- a) Civil Engineering 7 January 2027
- b) Chemical Engineering 7 January 2027
- c) Electrical Engineering 6 January 2027
- d) Mechanical Engineering 6 January 2027

5 VENUE

Details of the venue would be given to successful applicants at a later date.

6 APPLICATION

Application shall be online PEB website and payment made at (https://www.peb.gov.sq) no later than 30 Sep 2026. For submission of required documents specified in the checklist, please send email to registrar@peb.gov.sg for an appointment within 1 week from application made online. Please note that submission is strictly by appointments only and that late submissions would not be accepted. Applicants are advised to send in their applications early to allow time for processing. They would be informed of the status of their applications and other details by post at least two weeks before the examinations.

7 STRUCTURE OF EXAMINATION

A summary of the structure of the Fundamentals of Engineering Examination is shown in the table below. The examination is 'open book' and further details are given in <u>Annex A: Format and Syllabus</u>, <u>Reading Lists and Sample Questions /</u> <u>Questions From Past Year Papers</u>.

Subjects	Time Allocated	Format		
FEE Part 1 Core engineering subjects in civil/mechanical/electrical/chemical engineering	*3 hours & 10 mins (9.00am – 12.10pm)	40 Multiple Choice Questions (MCQ)		
FEE Part 2 Core/Elective subjects in civil/electrical/mechanical/chemical engineering	*3 hours & 10 minutes (2.00pm – 5.10pm)	 Answer 5 out of 9 questions (civil) Answer 5 out of 7 questions (electrical, mechanical, chemical) 		

* includes 10 minutes for reading the exam questions, etc.

For FEE (Civil) 2026, only answers based on Eurocodes and the relevant Singapore Annexes will be accepted. For transportation-related questions, AASHTO code is acceptable. Answers based on other codes and standards will not be accepted.

8 FINAL RESULTS AND NOTIFICATION

Examination results will be given to candidates on a Pass/Fail basis. No examination scores or marks will be given to candidates. Examination results will be mailed to the candidates around mid-April after the examination.

9 EXAMINATION APPEALS

A candidate who has failed the examination may submit a written appeal in hard copy to request a review of his/her performance. The appeal is to be received by PEB within **2 weeks after the date of results notification letter** and late appeals would not be considered. The result of the appeal/review will be sent by written mail to the appeal candidate. The appeal candidate would not be able to review the examination paper.

10 REVIEW COURSES

The Board does not endorse any review courses or materials provided as study aids.

11 NO REFUND OF FEES FOR ACCEPTED CANDIDATES

The application fee for the examination is non-refundable for candidates who have been accepted to sit for the examination.

12 REQUEST FOR ACCOMODATION

A candidate who has disabilities may submit a written request for accommodation. The request is to be received by PEB not later than 6 weeks before the date of examination and late request would not be considered. PEB's decision will be conveyed to the applicant by written mail not later than one week before the examination date.

Annex A: FORMAT AND SYLLABUS, READING LISTS, SAMPLE QUESTIONS AND QUESTIONS FROM PAST YEAR PAPERS

I <u>Fundamentals Of Engineering Examination (Civil)</u>

The examination will focus on testing the fundamentals of civil engineering. The 6-hour examination will comprise two parts. Part 1 catering for breadth, will comprise questions on core civil engineering subjects, typical of courses covered during the 1st and 2nd year of a 4-year civil engineering undergraduate course. Part 2 catering for depth, will comprise more core and elective civil engineering courses covered during the 3rd and 4th year of a 4-year civil engineering undergraduate course.

For FEE (Civil) 2026, only answers based on Eurocodes and the relevant Singapore Annexes will be accepted. For transportation-related questions, AASHTO code is acceptable. Answers based on other codes and standards will not be accepted.

Format

• FEE Part 1 (Civil) (3 hours & 10 mins) – 40 MCQ questions

- CE 101 Mechanics of Materials
- CE 102 Structural Mechanics
- CE 103 Structural Analysis
- CE 104 Soil Mechanics
- CE 105 Fluid Mechanics

• FEE Part 2 (Civil) (3 hours & 10 mins) – 5 out of 9 questions

- CE 201 Reinforced and Prestressed Concrete Structures (2 Qs)
- CE 202 Steel Structures (2 Qs)
- CE 203 Geotechnical Engineering (2 Qs)
- CE 204 Transportation (1 Q)
- CE 205 Hydraulics and Hydrology (1 Q)
- CE 206 Environmental Engineering (1 Q)

Syllabus

<u>CE 101 Mechanics of Materials</u>

Mechanics of Materials

Strength, stiffness and deformability; Stress-strain relations; ductility and brittle fracture; time-dependent properties; creep, creep rupture; relaxation; cyclic load behaviour.

Concrete Technology

Concrete-making materials, properties of fresh and hardened concrete, mixing, placing, and curing, mix design, destructive and non-destructive tests, quality control, durability, and special concrete.

Steel

Basic metallurgy, mechanical properties and applications, welding technology and corrosion.

• CE 102 Structural Mechanics

Structural Mechanics

Statics and kinetics of particles, equilibrium of rigid bodies, kinematics and plane motion of rigid bodies, analysis of simple trusses and beams, analysis of structural members subjected to tension, compression, torsion, and bending, including such fundamental concepts as stress, strain, and elastic behaviour. Bar forces in compound and complex trusses. Bending moment, shear and axial forces of beams and frames.

• <u>CE 103 Structural Analysis</u>

Structural Analysis

Displacements of elastic determinate structures: principle of virtual work and energy theorems. Analysis of indeterminate structures. Deformation of indeterminate structures and influence line method. Displacement techniques using slope-deflection and moment distribution methods. Plastic theory and analysis. Theory and applications of modern structural analysis. Concepts of equilibrium, compatibility and force-displacement relationships. Direct stiffness method. Matrix formulation of trusses, beams and frames. Stability concepts and elastic stability analysis of framed structures.

• CE 104 Soil Mechanics

 Basic geology, unified soil classification system, mechanical properties, effective stress principle, shear strength, compressibility, and seepage and consolidation; Mohr-Coulomb failure criterion (drained and undrained), settlement calculations, rate of consolidation using classical Terzaghi theory.

• CE 105 Fluid Mechanics

Fluid Statics

Fluid properties; hydrostatic pressure and thrust; buoyancy; stability of floating bodies.

Fluid Motion

Continuity equations; Bernoulli's equation; linear momentum equation.

Similitude

Dimensional analysis; design of hydraulic models.

<u>CE 201 Reinforced and Prestressed Concrete Structures</u>

RC Design

Basic structural members and structural systems. Loads and load effects. Section analysis and design for bending. Design for shear, torsion and bond. Corbels. Serviceability and durability requirements. Design of short and slender columns. Design of slab systems. Concentrated loads on slabs. Design of foundations. Retaining walls. Reinforced concrete detailing.

Prestressed Concrete Design

Basic concepts of prestressing. Materials and prestressing systems. Prestressed losses and time dependent deformation. Behaviour and design of members subject to flexure, shear and combined axial and bending action.

• <u>CE 202 Steel Structures</u>

Steel Design

Limit state design. Material properties and structural responses. Local buckling and section classifications. Design of fully restrained beams. Shear buckling and design of plate girder. Web bearing and buckling. Design of web stiffeners. Lateraltorsional buckling and design of laterally unrestrained beams. Tension and compression members. Axially loaded members with end moments. Design of steel connections. Plastic design of portal frames. Continuous multi-storey frames.

• CE 203 Geotechnical Engineering

Slope Stability and Earth Retaining Structures

Introduction to slope stability and earth retaining structures; slopes and embankments; earth pressure and retaining structures; deep excavations; calculation of active and passive earth pressures; design considerations pertaining to deep excavations.

Foundation Engineering

Site investigation and interpretation of soil reports; shallow foundations and deep foundations; selection of appropriate foundation type; capacity and settlement requirements.

<u>CE 204 Transportation</u>

Transportation Engineering

Transportation systems, planning and management; geometric design of roads and intersections; design of flexible and rigid pavements.

Traffic Engineering

Traffic flow studies; traffic data analysis; traffic management; highway and intersection capacity; traffic signal control. Parking.

<u>CE 205 Hydraulics and Hydrology</u>

Hydraulics

Friction and minor losses in pipe flow; pipe and pump systems; pipe network analysis; open channel flow; uniform flow, Manning's equation; critical flow; energy and momentum principles; hydraulic jumps; gradually varied flows, backwater computation.

Hydrology

Processes in the hydrologic cycle: basic meteorology, rainfall precipitation, evaporation and transpiration, infiltration, subsurface flow, surface runoff, streamflow measurement and hydrograph analysis; unit hydrograph principles and applications; frequency analysis of rainfall or flood data; reservoir and channel flood routing; urban storm drainage design, flood peak estimation.

<u>CE 206 Environmental Engineering</u>

Environmental Engineering

Basic physical, chemical and biological water quality parameters; physical, chemical, and biological processes for water and wastewater treatment; water treatment principles and design; water distribution systems; wastewater collection and pumping systems; wastewater treatment design; pretreatment, primary, secondary, tertiary treatment, and anaerobic digestion.

Recommended Reading List for Civil Engineering

FEE Part 1 (Civil)

CE101 Mechanics of Materials

1) Hibbeler, R. C., "Mechanics of Materials" 9th Edition SI units, 2014.

CE120 Structural Mechanics

1) West, H. H. and Geshwinder, L. F. "Fundamentals of Structural Analysis" 2nd Edition, John Wiley and Sons, Inc, 2002.

CE103 Structural Analysis

1) West, H. H. and Geshwinder, L. F. "Fundamentals of Structural Analysis" 2nd Edition, John Wiley and Sons, Inc, 2002.

CE104 Soil Mechanics

1) Knappett, J.A. and Craig, R.F., "Craig's Soil Mechanics" 9th edition, CRC Press. 2019.

CE105 Fluid Mechanics

- 1) Finnemore, E.J., and Franzini. J.B. "Fluid Mechanics with Engineering Applications." 10th ed. Boston: McGraw Hill. 2002.
- 2) Young, D.F., Munson, B., Okiishi T.H. "A Brief Introduction to Fluid Mechanics", John Wiley and Sons, 3rd edition, 2004.

FEE Part 2 (Civil)

CE201 Reinforced and Prestressed Concrete Structures

- 1) E. O'Brien, A. Dixon and E. Sheils, "Reinforced and Prestressed Concrete Design to EC2: The Complete Process" 2nd Edition, Spon Press, 2013.
- 2) P. Bhatt, T.J. MacGinley and B.S. Choo, "Reinforced Concrete Design to Eurocodes Design Theory & Examples" 4th Edition, CRC Press Taylor& Francis Group, 2014.

CE202 Steel Structures

- 1) Gardner L and Nethercot D, Designers' guide to Eurocode 3: Design of Steel Buildings, EN 1993-1-1, -1-3 and -1-8, 2nd Edition, Thomas Telford, 2011.
- 2) Steel building design: Concise Eurocodes, Steel Construction Institute (SCI) Publication P362, 2009.
- Steel Building Design: Worked Examples Open Sections, Steel Construction Institute (SCI) Publication P364, 2009.
- 4) Martin, L. and Purkiss, J., "Structural Design of Steelwork to EN 1993 and EN 1994", 3rd edition, Butterworth-Heinemann, UK, 2008.

CE203 Geotechnical Engineering

- 1) J. A. Knappett, and R. F. Craig, "Craig's Soil Mechanics" 9th Edition, CRC Press. 2019.
- 2) D. P. Coduto, M. R. Yeung, and W. A. Kitch, "Geotechnical Engineering: Principles and Practices", 2nd edition, Pearson, 2011.
- 3) Michael Tomlinson and John Woodward, "Pile Design and Construction Practice", 6th Edition, CRC Press, 2014.

CE204 Transportation

- 1) Mannering F. L. and Washburn, S. S. "Principles of Highway Engineering and Traffic Analysis" 7th Edition, Wiley, 2020.
- 2) Garber N. and Hoel, L. "Traffic and Highway Engineering" 4th Edition, Cengage Learning, 2010.
- 3) Papagiannakis, A.T. and Masad, E.A. "Pavement Design and Materials", Wiley. 2012.

CE205 Hydraulics and Hydrology

1) Linsley, R. K. Kohler, M. A. and Paulhus, J. L. H. "Hydrology for Engineers", SI Edition, McGraw Hill Book Co. 1998.

- 2) Chow, V. T. Maidment, D.R., Mays, L. W., "Applied Hydrology", McGraw Hill Book Co, 1988.
- 3) Chadwick, A., Morfett, J., and Borthwick, M., "Hydraulics in Civil and Environmental Engineering", 4th Edition, Spon Press, 2004.

CE206 Environmental Engineering

1) Viessman, W. and Hammer, M.J. "Water Supply and Pollution Control", 7th Edition, Pearson Prentice Hall, 2004.


Questions From Past Year Papers for Fundamentals Of Engineering Examination Part 1 (Civil)

Questions from past year papers for Fundamentals Of Engineering Examination Part 1 (Civil) based on BS and EC Codes.

For FEE (Civil) 2026, only answers based on Eurocodes and the relevant Singapore Annexes will be accepted. Answers based on other codes and standards will not be accepted.

(Actual paper comprises 40 Multiple Choice Questions (MCQ) of 2.5 marks each. Answer all questions.)

- 1. Which cement is advantageous when concrete is to be used in seawater or exposed directly along the seacoast?
 - (a) Quick setting cement
 - (b) High alumina cement
 - (c) Ordinary Portland cement
 - (d) Slag or pozzolana cement
- 2. Increasing the carbon content of steel will reduce
 - (a) Ductility
 - (b) Brittleness
 - (c) Strength
 - (d) Hardness
- 3. For the steel truss shown in Figure Q3, what is the elongation of member AB given that AB is a solid rod of diameter = 20 mm and modulus of elasticity = 200 GPa. Select the closest answer from the following:



- (a) 0.76 mm
- (b) 0.95 mm
- (c) 1.43 mm
- (d) 1.91 mm

4. A circular reinforced concrete column shown in Figure Q4, with total cross section area of 0.07 m², is reinforced by 6 steel bars (total steel cross section area is 0.003 m²) to support a centric force of 1 MN. The total length of the column is 4 m and the modulus of elasticity for concrete is 25 GPa whereas that for the steel bars is 200 GPa. Which value below is closest to the average normal stress in the steel, assuming that the concrete and steel reinforcements are fully bonded?



Figure Q4

- (a) 168 MPa
 (b) 88 MPa
 (c) 44 MPa
 (d) 11 MPa
- 5. For the structural model shown in Figure Q5, what is the magnitude of the maximum bending moment along section ABC of the lower beam AE.

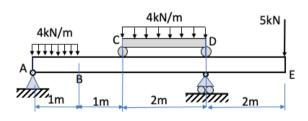


Figure Q5

- (a) 3 kNm
- (b) 2 kNm
- (c) 1 kNm
- (d) None of the above

6. For the frame shown in Figure Q6 where the beam and columns have plastic moment capacities of M, what is the minimum collapse load?

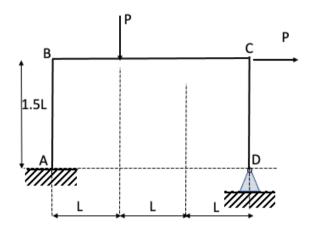


Figure Q6

- (a) M/L
- (b) 1.6M/L
- (c) 2M/L
- (d) 3M/L
- 7. An undisturbed soil sample has a volume of 196 cm³ and weighs 333 g. Its water content is 45%. The specific gravity of the soil is 2.65. Determine the dry unit weight and degree of saturation of the soil.
 - (a) 18.5 kN/m³, 45.0%
 - (b) 16.7 kN/m³, 74.5%
 - (c) 15.4 kN/m³, 82.3%
 - (d) 11.5 kN/m³, 94.5%
- 8. Which of the following laboratory tests is able to give the total and effective shear strength parameters of a clay soil?
 - (a) Unconfined Compression test
 - (b) Unconsolidated Undrained triaxial test
 - (c) Consolidated Drained triaxial test
 - (d) None of the above

9. In Figure Q9, what is the pressure downstream of the flow reducer, P₂, if energy losses in flow can be neglected?

Useful Formula: $\frac{P_1}{\rho g} + \frac{V_1^2}{2g} + Z_1 = \frac{P_2}{\rho g} + \frac{V_2^2}{2g} + Z_2$


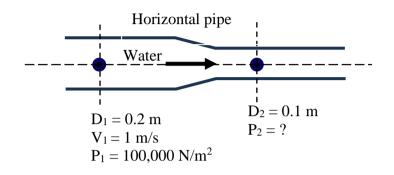


Figure Q9

- (a) 98,500 N/m² (b) 92,500 N/m² (c) 68,500 N/m² (d) None of the above
- 10. What is the magnitude of the resultant hydrostatic thrust F_R acting on the 1 m diameter circular gate mounted on the side of a water tank in Figure Q10?

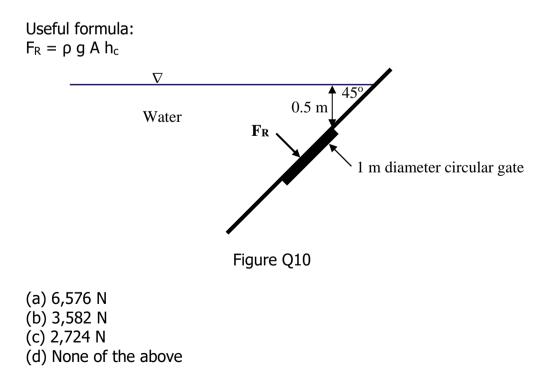

Questions From Past Year Papers for Fundamentals Of Engineering Examination Part 2 (Civil)

Questions from past year papers for Fundamentals of Engineering Examination Part 2 (Civil) based on BS and EC codes.

(Note: For FEE (Civil) 2026, only answers based on Eurocodes and the relevant Singapore Annexes will be accepted. Answers based on other codes and standards will not be accepted.)

(Actual paper comprises 9 questions. Answer 5 questions)

Q1.

Figure Q1 shows the cross section of a T-shape column, subjected to axial load and bending moment about y-y axis.

With the following design data, calculate the maximum pure axial capacity, maximum bending moment capacity and construct N-M interaction diagram for the cross section.


Design data and assumptions:

Concrete strength: $f_{ck} = 45 \text{ N/mm}^2$ Yield strength of reinforcement bar: $f_{yk} = 500 \text{ N/mm}^2$ Density of reinforced concrete = 25 kN/m³ Concrete cover to centre of rebar = 40 mm Concrete ultimate strain, $\varepsilon_{cu} = 0.0035$ Young modulus for streel reinforcement = 200,000 N/mm²

For tension failure case that is required for the construction of N-M interaction diagram, you can assume that the neutral axis is 100 mm from extreme compression face.

Calculations shall be performed in accordance to relevant Eurocodes.

(20 marks)

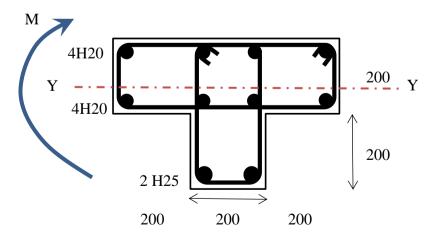

(Note: drawings are not drawn to scale, all dimensions in mm U.N.O.)

Figure Q1

Q2.

To facilitate excavation for a new underground MRT station, a steel strutting and waling system together with concrete diaphragm wall are to be used for its construction. The transverse design strut force to be transmitted to the concrete wall is 3500 kN as shown in Figure Q2.

(a) Calculate the bearing and buckling resistances of the unstiffened web of the waler which is subjected to the transverse strut force. The sizes of the strut and waler as well as the strut-waler connection details are indicated clearly in the figure.

(10 marks)

(b) Determine whether the unstiffened web of the waler is adequate to transfer the design strut force or not. Propose an effective strengthening scheme if it is inadequate. Detailed design of the strengthening scheme is not required.

(10 marks)

You may assume that the strut is not at the end or near the end of the waler. State clearly your other design assumptions, if any.

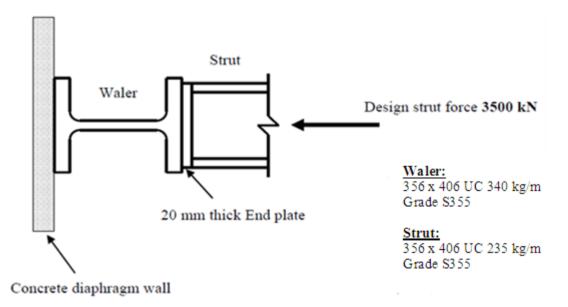


Figure Q2

Q3.

(a) A rectangular short column of size 350 mm by 500 mm is required to resist an axial load of 3600 kN. What is the area of steel required? Provide a sketch showing the reinforcement details, including the links to be provided.

(8 marks)

(b) Re-design the rectangular column in Part (a), of size 350 mm and 500 mm to resist an additional bending moment of 300 kNm. Provide a sketch showing the revised reinforcement details, including the links to be provided.

(12 marks)

Assume a clear cover of 30 mm to the links. Use $f_{ck} = 32 \text{ N/mm}^2$ and $f_{yk} = 500 \text{ N/mm}^2$. State clearly why the respective reinforcing bar sizes are chosen.


Design aids in the form of design charts or tables may be provided.

Q4.


(a) A 0.8 m diameter bored pile (weight density = 25 kN/m^3) is to be formed in a clay site with the representative undrained shear strength (c_u) profile as shown in Figure Q4. The groundwater table is at the ground surface. Determine the ultimate axial load capacity of the pile under undrained condition if the embedment length of the pile is 20 m.

(14 marks)

(b) If a 1 m thick sand fill is placed on the site, what additional load will the pile experience? Describe the effect of this load on the load carrying capacity of the pile and estimate the maximum possible magnitude of this load in the clay.

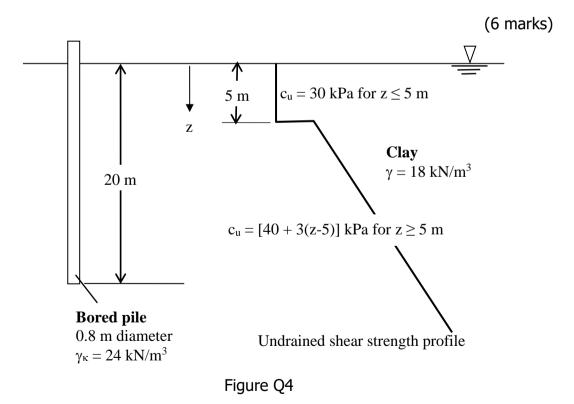

- Q5.
- (a) A pair of <u>vertical</u> curves are to connect a series of tangent grades for which the slopes are shown in Figure Q5. The middle section is 150 metres long.

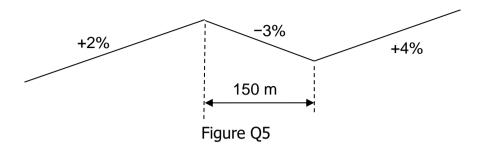

The following information is provided for design calculation. Driver reaction time: 2.5 seconds Driver eye height: 1.050 metres Tyre-pavement friction coefficient: 0.30 Object height for stopping: 0.150 metres Road design speed: 70 km/h

- (i) The required minimum stopping sight distance for motorists is found to be 120.0 metres on the crest curve, and 122.7 metres on the sag curve. Show how the value for the minimum stopping sight distance is obtained for either the crest curve or the sag curve.
- (ii) Calculate the minimum length of the crest curve, and the sag curve, that satisfies the respective minimum stopping sight distance. Hence, show that the middle section is too short for the pair of vertical curves to be fully developed.

(10 marks)

(b) A 3-layer flexible pavement is to be constructed using materials with properties given in the following table.

Material	Drainage coefficient (<i>m's</i>)	Layer coefficient (a's)	SN value above layer (from AASHTO charts)
Asphalt concrete	impermeable	0.45	not applicable
Granite aggregate	1.20	0.20	2.3
Sandy gravel	1.10	0.12	3.3
Roadbed soil	0.60	0.05	4.3

- (i) Compute the thickness of each layer in the flexible pavement.
- (ii) List several advantages of a flexible pavement design over that of a rigid pavement.

(10 marks)

LIST OF FORMULAE

Reaction Distance, d_r:

$$d_r = vt_r$$

Braking Distance, d_b:

$$d_{b} = \frac{v^2}{2g(f \pm G)}$$

Minimum Length (Crest Curve), Lmin:

$$L_{\min} = \begin{cases} \frac{AS^2}{200(\sqrt{h_1} + \sqrt{h_2})^2} & \text{When } S \le L \\\\ \frac{2S}{2} - \frac{200(\sqrt{h_1} + \sqrt{h_2})^2}{A} & \text{When } S > L \end{cases}$$

Minimum Length (Sag Curve), Lmin:

$$L_{\min} = \begin{cases} \frac{AS^2}{200[0.6 + S(\tan 1^\circ)]} = \frac{AS^2}{120 + 3.5S} & \text{When } S \le L \\ \\ \frac{2S - \frac{200[0.6 + S(\tan 1^\circ)]}{A}}{A} = 2S - \frac{120 + 3.5S}{A} & \text{When } S > L \end{cases}$$

AASHTO Structural Number (SN) Equation:

 $SN = a_1D_1 + a_2D_2m_2 + a_3D_3m_3 + \dots$

Q6.

A sluice gate is installed in a rectangular open channel with a width B = 2 m. The flow depth measured at a location (Section 1) immediately downstream of the sluice gate is 0.5 m, and its mean flow velocity is 4 m/s.

(a) What is the flow rate, Q (m³/s) in the channel under this flow condition?

(2 marks)

(b) What is the specific energy, E_1 at Section 1 under this flow condition?

(3 marks)

(c) What is critical specific energy, E_c under this flow condition?

(3 marks)

(d) What is the flow regime (i.e., sub-critical, critical, or super-critical flow) at Section 1?

(2 marks)

(e) A hydraulic jump occurs downstream of the sluice gate. The initial depth of the jump occurs at Section 1. What is the sequent depth, y₂ of the jump?

(5 marks)

(f) If the Manning's coefficient n of the channel = 0.02, estimate the channel bed slope, S₀. State your assumption(s).

(5 marks)

Useful equations:

- (a) Specific energy, $E = y + \frac{V^2}{2g}$, where V = velocity, y = flow depth.
- (b) Critical specific energy, $E_c = 1.5 y_c$ for a rectangular channel.
- (c) Critical flow depth, $y_c = \sqrt[3]{\frac{q^2}{g}}$ for a rectangular channel, where q [m²/s] = discharge per unit width = Q/B, Q = flow rate, B = channel width, g = gravitational acceleration.
- (d) Simple hydraulic jump equation for a rectangular channel is $y_2 = \frac{y_1}{2} \left(\sqrt{1+8} F r_1^2 1 \right)$ where $Fr_1 = \frac{V_1}{\sqrt{gy_1}}$ = Froude number at the initial depth location, y_1 = initial depth, y_2 = sequent depth, V_1 = velocity at the initial depth location.
- (e) Manning's equation, $Q = \frac{1}{n} A R_h^{2/3} S_o^{1/2}$, where n = Manning's coefficient, S_o = channel bed slope, R_h = hydraulics radius (= A/P), A = flow area, P = wetted perimeter.

Professional Engineers Registration Examination FEE 2026

- Q7.
- (a) A primary clarifier with a surface area overflow rate of 55 m³/m².day receives a wastewater from an equivalent population of 45,000 having a capita flow rate of 550 L/d and a per capita suspended solids (SS) of 32 g/d.
 - (i) Determine the clarifier **diameter** and **depth** based on a 2-hour hydraulic retention time.

(4 marks)

Determine the volume of primary sludge produced daily if 75% of the SS are removed by the clarification process. Assume that the sludge contains 1.5% SS, the sludge specific gravity is 1.005, and a water density of 1,000 kg/m³.

(4 marks)

- (b) An activated sludge process is used to treat a combined wastewater from two separate sources of seafood processing and raw sugar refining, respectively. The seafood processing produces a wastewater stream of 200 m³/d with 550 BOD₅/L, and the sugar refinery produces another wastewater stream of 320 m³/d with 650 BOD₅/L. The activated sludge reactor is operating at an organic loading rate 0f 4 kg BOD₅/m³.d.
 - (i) Calculate the **volume** of the reactor and the **hydraulic retention time** based on the combined wastewater flow and BOD₅ concentration.

(6 marks)

(ii) For a Food/Microorganism ratio of 0.6 kg BOD₅/kg MLVSS.d, what MLVSS concentration should be maintained in the aeration tank?

(3 marks)

(iii) Estimate the mean cell residence time, assuming an effluent volatile solids concentration of 20 mg/L and the daily amount of waste sludge is 95 m³ that contains 1% of volatile solids.

(3 marks)

Given:

Hydraulic retention time = BOD₅ concentration/ Organic loading rate

 $F/M = (Q X S)/(V_r X MLVSS)$

Mean cell residence time, $\theta_C = V_r X MLVSS / (Q_e X X_e + Q_w X X_r)$

Where:

F/M is food to Microorganism ratio

Q is Flow rate

S is organic concentration BOD_5

 $V_{\text{r}} \, \text{is volume of reactor}$

 θ_C is Mean cell residence time

MLVSS is Mixed Liquor Volatile Suspended Solid

 Q_e is effluent flow rate m³/d

X_e is effluent volatile solids

 Q_w is waste sludge flow rate m³/d

X_r is volatile solid in sludge

II <u>Fundamentals Of Engineering Examination (Electrical)</u>

The examination will focus on testing the fundamentals of electrical power engineering. The 6-hour examination will comprise two parts.

Format

- FEE Part 1 (Electrical) (3 hours & 10 mins) 40 MCQ questions
 - EE 101 Principles of Power Engineering

• FEE Part 2 (Electrical) (3 hours & 10 mins) - 5 out of 7 questions

• EE 201 Power System Analysis and Utilization

Syllabus

• EE 101 Principles of Power Engineering

Three-phase Circuits and Systems

Review of single-phase circuits. Three-phase voltage generation. Phasor diagrams. Wye and delta connections. Balanced / unbalanced three-phase loads. Active, reactive and apparent power. Power measurements. Power factor correction.

Magnetism and Magnetic Circuits

Magnetic fields. Magnetic materials and magnetization curves. Magnetic equivalent circuits. Electromagnetic induction. Sinusoidal excitation. Magnetic losses.

Transformers

transformer. Phasor Ideal Equivalent circuits. diagrams. Determination parameters. Performance evaluation. of Autotransformers. Three-phase transformers. Phase shift transformers.

• AC and DC Machines

DC Machines: operating principle, voltage and torque equations, classification, torque-speed characteristics, losses and efficiency. Three-phase induction motors: operating principle, assist starting, starting methods, equivalent circuit, torque-speed characteristics, losses and efficiency. Brushless DC motor, PMSM.

Power Electronics

Introduction to power conversion. Harmonics. AC to DC conversion. DC to DC conversion. DC to AC conversion. DC servo motor drive systems. AC variable-speed induction motor drive systems. Permanent magnet and stepping motor drive systems. Power Electronics devices.

Fundamental of Power Systems

Energy sources. Per unit system. Power system components and representation: synchronous generators, transmission lines and cables. Load representations. Power transfer. Power system stability.

Power Flow Modelling

System components modelling. Formulation of power flow equations. Methods of power flow solution.

Applications of High-voltage Engineering

Insulation materials and properties. Electrical breakdown in gases, liquids, and solids. High voltage cables. High voltage switchgear. Lightning and surge protection. Acceptance and routine tests on apparatus.

• EE 201 Power System Analysis and Utilizations

Power System Operation and Control

Governor control systems. Active power and frequency control. Production and absorption of reactive power. Methods of voltage control. Reactive power and voltage control. Application to transmission and distribution systems.

Analysis of Symmetrical and Unsymmetrical Faults

Three-phase faults and fault level calculations. Symmetrical components. Sequence impedances and sequence networks. Unsymmetrical faults.

Electric Power Distribution Systems

Distribution system configurations. Primary and secondary distribution. Ring, radial and inter-connected systems. Distribution substation layout. Planning criteria and network design.

Building Services Engineering

Estimation of power demand. Conductor sizing and correction factors. Earthing system, earth fault and touch voltage.

General Protection Principles

Basic protection principles. Instrument transformers. Coordination of IDMTL and DTL overcurrent and earth protection for distribution systems. Differential protection of feeders and transformers.

Electric Drives

Controlled converter fed DC motor drives. Chopper circuit configurations in DC drives. Inverter fed AC drives. Variable voltage and variable frequency operation. Power quality and harmonics.

Sustainable Energy Technology and Applications

Distributed energy resources. Sustainable energy technology. Solar PV technology. PV system design. Grid-tied PV systems. Energy conversion and energy storage system.

Recommended Reading List for Electrical Engineering

FEE Part 1 (Electrical) EE 101 Principles of Power Engineering

- 1) Guru Bhag S and Hiziroglu Huseyin R, Electric Machinery and Transformers, 3rd Edition, Oxford University Press, 2001.
- 2) Sen Paresh Chandra, Principles of Electric Machines and Power Electronics, Hoboken, NJ: John Wiley & Sons, 2014.
- 3) Chapman Stephen J, Electric Machinery and Power System Fundamentals, 1st Edition, McGraw-Hill, 2002.
- 4) Wildi Theodore, Electrical Machines, Drives and Power Systems, 6th Edition, Pearson/Prentice-Hall, 2006

FEE Part 2 (Electrical) EE 201 Power System Analysis and Utilizations

- 1) Grainger John J and Stevenson William D, Power System Analysis.
- 2) Weedy B M and Cory B J, Jenkins N, Ekanayake J B, Strbac G, Electric Power Systems.
- 3) Code of Practice for Electrical Installations, (Singapore Standards, SS638:2018), Enterprise Singapore 2018.
- 4) Lakervi E and Holmes E J, Electricity Distribution Network Design, (IEE Power Engineering Series).
- 5) Naidu M S and Kamaraju V, High Voltage Engineering.
- 6) Ram Badri and Vishwakarma D N, Power System Protection and Switchgear.
- 7) Teo Cheng Yu, Principles and Design of Low Voltage Systems.
- 8) Blackburn J Lewis, Protective Relaying: Principles and Applications.
- 9) Code of Practice for Grid Connected Solar Photovoltaic System, The Institution of Engineering and Technology, 2015
- 10) David William Spitzer, Variable Speed Drives

Questions From Past Year Papers for Fundamentals Of Engineering Examination Part 1 (Electrical)

(Actual paper comprises 40 Multiple Choice Questions (MCQ) of 2.5 marks each. Answer all questions.)

- 1. A three-phase generator supplies 3.6 kVA at a power factor of 0.85 lagging. If 2500 W is delivered to the load and line losses are 80 W per phase, what are the losses in the generator?
 - (a) 480 W (b) 320 W (c) 860 W (d) 240 W
- 2. A three-phase Y-connected generator with a phase voltage of 500 V and a frequency of 50 Hz is connected through power lines to a balanced delta-connected load that consumes 400 kW of power at 0.77 pf lagging. What is the phase current of the load?
 - (a) 154 A (b) 266 A
 - (c) 200 A
 - (d) 346 A
- 3. With reference to Figure Q5, determine the Vrms induced in the coil if a 50 Hz ac current of 0.3 sin(ω t) A is flowing through the coil. Inductance L is given as 0.24 H..




Figure Q5

- (a) 22.6 V
- (b) 16 V
- (c) 11.3
- (d) 8 V

- 4. A 1,000 KVA transformer has 2,500 watts iron loss, and 11,000 watts copper loss at full load. The power factor is 0.85 lagging. Calculate the all-day efficiency of the transformer at daily load cycle of 14 hours half load and 10 hours full load.
 - (a) 97.32% (b) 98.58%
 - (c) 99.20%
 - (d) 99.75%
- 5. The copper losses of a 1,000 kVA, 22/0.4 kV, 3 phase, delta-star connected transformer are 1.5 kW and 0.6 kW on high voltage and low voltage side respectively. Find the total resistance in ohms per phase at 22kV side (r1) and 400V side (r2).
 - (a) r1 = 0.726, r2 = 0.000096(b) r1 = 2.178, r2 = 0.000096(c) r1 = 6.534, r2 = 0.000288(d) r1 = 2.179, r2 = 0.000288
 - (d) r1 = 2.178, r2 = 0.000288
- 6. A 3-phase induction motor is required to drive a factory ventilation fan in Singapore. The mechanical facility engineer has determined that the fan requires a torque of 300 Nm to run at a speed of approximately 1000 rev/min. Which of the following motors will you select for the application?
 - (a) 3-phase, 50 Hz, 400 V, 50 kW, 2-pole
 - (b) 3-phase, 50 Hz, 400 V, 50 kW, 4-pole
 - (c) 3-phase, 50 Hz, 400 V, 25 kW, 6-pole
 - (d) 3-phase, 50 Hz, 400 V, 50 kW, 6-pole
- 7. In DC-DC converter control loop design, the open loop DC Gain of the converter
 - (a) should be as stable as possible
 - (b) should be as accurate as possible
 - (c) should be as high as possible
 - (d) should be as constant as possible

8. If $V_{DC} = 150V$ and Q1 has a maximum voltage rating of 220V, what would be the appropriate breakdown voltage V_Z value of the Zener diode used in the following circuit shown in Figure Q15?




Figure Q15

- (a) 50V
- (b) 100V
- (c) 150V
- (d) 200V
- 9. A 66 kV, 10 km transmission line delivers power of 100 MW at 0.9 lagging power factor to the load at the receiving end. The parameters of the line are such that the reactance per km is 0.3 ohm, and the resistance and shunt capacitance are negligible. Calculate the sending end voltage to maintain the receiving end voltage at 66 kV.
 - (a) 65.03 kV
 - (b) 66.97 kV
 - (c) 68.35 kV
 - (d) 70.58 kV
- 10. In the power flow studies, a generator can regulate its generator bus voltage at a specified value because
 - (a) the generator bus voltage is within the high and low voltage limits.
 - (b) the generated active power is within the unit's maximum and minimum P limits.
 - (c) the generated reactive power is within the unit's maximum and minimum Q limits.
 - (d) the supplied generator current is within its rated value.

(Actual paper comprises 7 questions. Answer 5 questions)

Examination Part 2 (Electrical)

Q1.

A 100-MVA, 22-kV generator with synchronous reactance of 1.7 pu supplies power to an infinite bus at rated voltage.

(a) Find the induced emf and the power angle when the generator is supplying 50 MW at 0.85 pf lag.

(5 marks)

(b) If the steam input is kept constant and the excitation is increased by 15%, determine the induced emf, the power angle, the reactive power, and the power factor of the generator.

(11 marks)

(c) Is the generator under, normally, or over excited? Why?

(4 marks)

Q2.

A 50-MVA, 12.5 kV generator has a direct-axis sub-transient reactance of 0.25 per unit. The negative- and zero-sequence reactances are, respectively, 0.35 and 0.10 per unit. The neutral of the generator is solidly grounded. When a single line-to-ground fault occurs at the generator terminals with the generator operating unloaded at rated voltage, determine

(a) the sub-transient current (in amperes) in the generator, and

(8 marks)

(b) the line-to-line voltages (in kV) for sub-transient conditions.

(12 marks)

- Q3.
- (a) A main switch board is supplied from a 22/0.43 kV, 2.0 MVA transformer with an impedance of 6%. The impedance of LV cables to the main switchboard is $(0.0006 + j0.0012) \Omega$. The fault level at the 22 kV intake point is 800 MVA. Calculate the fault current at the main switchboard. State major assumptions you made, if applicable.

(8 marks)

(b) Electric power distribution systems can be configured in various ways to efficiently deliver electricity to consumers. The choice of configuration depends on factors such as load requirements, geographical location, cost, reliability, maintainability, and future expansion plans. Three common configurations for power distribution systems are:

Radial configuration Ring configuration Mesh configuration

Briefly discuss three (3) main features, three (3) advantages, and three (3) disadvantages for each of these configurations.


(12 marks)

Q4.

A 400 V three phase Main Switchboard (MSB) as shown in Figure Q4 supplies to a three phase 150 kW electric motor with power factor of 0.85 lagging and efficiency of 90% which is located 80 metres away.

The electric circuit from the MSB to the motor is laid horizontally, touching on a cable tray using single-core, copper conductor, XLPE insulation and PVC sheath cables. The section of the electric circuit from the MSB in the corridor is 25 metres long. It shares with another two circuits and the ambient temperature is 35 °C.

The section of the electric circuit in the furnace room to the motor is 55 metres long and is on its own. The ambient temperature in the furnace room is 50 °C. Overload protection of the cables is by a Triple Pole (TP) MCCB in the MSB. Earth fault protection is by an Earth Leakage Relay with current setting of 2 A and time setting of 0.3 sec.

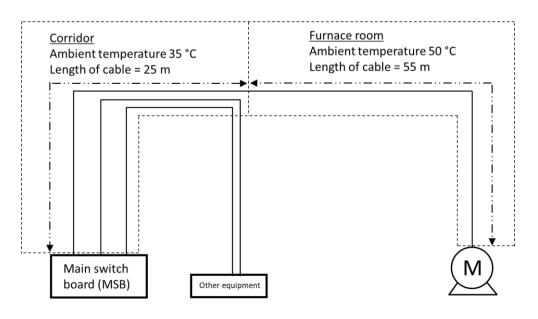



(a) Select the appropriate cable size for the cable to the motor. The cable is required to be protected against overload.

(6 marks)

(b) Calculate the voltage drop in the steady load conditions when the motor is operating at full load.

(3 marks)

(c) During motor starting, the power factor drops to 0.3 and the starting current is 3 times the full-load current, calculate the voltage drop during motor starting.

(3 marks)

(d) The earth fault loop impedance measured at the motor is 0.6 Ω , what is the prospective earth fault current?

(2 marks)

(e) A single core, copper, PVC insulated cable is used as the circuit protective conductor of the motor, use the Table 5.5 below to determine the cable size of the circuit protective conductor.

(2 marks)

(f) Check whether the circuit protective conductor size is adequate to withstand the thermal effect of the earth fault current.

(4 marks)

Available TP MCCB current ratings are 100 A, 200 A, 300 A, 400 A, 600 A, 800 A, 1,000 A

Conductor cross sectional area (mm ²)	Current carrying capacity (amperes) Reference Method 11 (on a perforated cable tray horizontal or vertical) 3 or 4 cables, 3-phase a.c. flat and touching or trefoil (A)	Voltage drop (per ampere per metre) Reference Methods 1&11 (flat and touching) (mV/A/m)		etre) hods nd
		r	Х	Z
35	176	1.15	0.18	1.15
50	215	0.86	0.18	0.87
70	279	0.59	0.175	0.62
95	341	0.43	0.170	0.46
120	398	0.34	0.165	0.38
150	461	0.28	0.165	0.32
185	530	0.22	0.165	0.28
240	630	0.170	0.165	0.24
300	730	0.135	0.160	0.21

Table 4.1: Current carrying capacity and voltage drop of single core copper cables having thermosetting insulation, non-armoured, with or without sheath

Type of insulation	Operating Temp (°C)	Ambient temp (°C)								
		25	30	35	40	45	50	55	60	65
Rubber	60	1.04	1.0	0.91	0.82	0.71	0.58	0.41	-	-
General purpose PVC	70	1.03	1.0	0.94	0.87	0.79	0.71	0.61	0.50	0.35
Paper	80	1.02	1.0	0.95	0.89	0.84	0.77	0.71	0.63	0.55
rubber	85	1.02	1.0	0.95	0.90	0.85	0.80	0.74	0.67	0.60
Heat resisting PVC	90	1.03	1.0	0.97	0.94	0.91	0.87	0.84	0.80	0.76
Thermosetting (e.g. XLPE)	90	1.02	1.0	0.96	0.91	0.97	0.82	0.76	0.71	0.65

Table 4.2: Correction factors for ambient temperature where protection is against short circuit

Reference Method of installation		Correction factor (C _g)				
	Number of circuits or multicore cables					
	2	3	4	5	6	
Enclosed or bunched and cli to a non-metallic surface (M	• •	0.80	0.70	0.65	0.60	0.57
Single layer clipped to a	Touching	0.85	0.79	0.75	0.73	0.72
non-metallic surface (Method 1)	Spaced	0.94	0.90	0.90	0.90	0.90
Single layer multicore on a	Touching	0.86	0.81	0.77	0.75	0.74
perforated metal cable tray, vertical or horizontal (Method 11)	Spaced	0.91	0.89	0.88	0.87	0.87
Single layer single core on Horizonta a perforated metal cable		0.90	0.85			
tray, touching (Method 11) Vertical		0.85				
Single layer multicore touchi ladder supports (Method 13)	0.86	0.82	0.80	0.79	0.78	

Table 4.3: Correction Factors for groups of more than one circuit of single-core cables, or more than one multicore cable

Material of conductor	Insulation material				
	70 °C 90 °C 90 °C				
	thermoplastic	thermoplastic	Thermosetting (e.g. XLPE)		
Copper	115/103*	108/86*	143		
Aluminium	76/68*	66/57*	94		
Assumed initial temperature	70 °C	90 °C	90 °C		
Final temperature	160 °C / 140 °C	160 °C / 140 °C	250 °C		

* Above 300 mm²

Table 4.4 Values of k for protective conductor incorporated in a cable or bunched with cables, where the assumed initial temperature is 70 °C or greater.

Cross-sectional area of the	Minimum cross-sectional area of the corresponding protective conductor			
conductor S	If the protective conductor is of the same material as the line conductor	If the protective conductor is not of the same material as the line conductor		
(mm2)	(mm2)	(mm2)		
S ≤ 16	S	$\frac{k_1}{k_2} \times S$		
16 < S ≤ 35	16	$\frac{k_1}{k_2} \times 16$		
S > 25	$\frac{S}{2}$	$\frac{k_1}{k_2} \times \frac{S}{2}$		

K1 is the value of k for the line conductor K2 is the value of k for the protective conductor

Table 4.5 Minimum cross-sectional area of protective conductor in relation to the cross-sectional area of associated line conductor

Q5.

(a) A 22kV feeder is protected by an IDMT overcurrent relay with IEC standard inverse characteristic. The plug setting (PS) is 5A and time multiplier setting (TMS) is 0.23. Calculate the relay operating time when a current of 10 A and 50 A is injected.

Inverse definite minimum time (IDMT)

$$t = \frac{K \times [TMS]}{(I/Is)^{\alpha} - 1}$$

Where

- I = fault current
- Is = current threshold setting

 α = constant

TMS = time multiplier (0.025 to 1.2 in steps of 0.025)

Curve description	Constants		Minimum operation
Short time inverse	K = 0.05	α = 0.04	1.05 Is
Standard inverse	K = 0.14	α = 0.02	1.05 Is

Table 5: Formula and constants of IDMTL characteristic curve to IEC Standard

(5 marks)

(b) The specifications of a 500/5 current transformer (CT) is 5P20, 5 VA and CT resistance is 0.10Ω . The CT connected burden is 1.25 VA. Calculate the actual accuracy limiting factor (ALF) and convert it to primary of the CT?

(5 marks)

(c) A 22 kV/400V 1MVA Dy11 transformer is protected by an IDMTL overcurrent (OC) relay with IEC standard inverse characteristic on the 22 kV side. The current transformer ratio is 75/1. The OC relay plug setting (PS) is 0.75 A and time multiplier setting (TMS) is 0.35.

The transformer LV phase L1 cable developed an earth fault current of 10,000 A. Calculate the relay operating time. Which phase(s) showed trip indication?

(10 marks)

Q6.

(a) A permanent-magnet DC servo motor has the following parameters: Rated torque, $T_{rated} = 10 \text{ Nm}$ Rated speed, $N_{rated} = 3500 \text{ rpm}$ Torque constant, $K_T = 0.5 \text{ Nm/A}$ Voltage constant, $K_E = 50 \text{ V}/1000 \text{ rpm}$ Armature resistance, $R_a = 0.4 \Omega$

Calculate the terminal voltage V_t in steady state if the motor is required to deliver a torque of 5 Nm at a speed of 1500 rpm.

(8 Marks)

(b) When inverter-fed variable-frequency control is applied to induction motors, constant voltage/frequency (V/f) ratio is maintained. Motor torque-speed curves for various frequencies from full-load motoring to full-load braking can be assumed to be parallel straight lines, each passing through corresponding synchronous speed without significant error, as shown in Fig. Q6.

An induction motor has a full-load speed of 1430 rpm when supplied from an inverter at its rated frequency of 50 Hz and rated voltage. Determine

- (i) Speed for a frequency of 40 Hz and 80% of full-load torque.
- (ii) The frequency for a speed of 1000 rpm and full-load torque.
- (iii) The torque for a frequency of 30 Hz and speed of 850 rpm.
- (iv) The torque for a frequency of 40 Hz and speed of 1300 rpm (regenerative braking mode).
- Note: We can use simple trigonometry to calculate the torque-speed relationship because motor torque-speed curves for various frequencies from full-load motoring to full-load braking can be assumed to be parallel straight lines, each passing through corresponding synchronous speed.

(12 Marks)

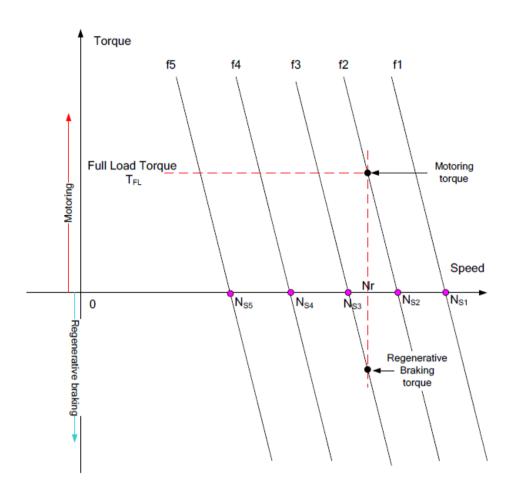


Figure Q6 – Torque-speed curve of an induction motor under constant V/f control

III Fundamentals Of Engineering Examination (Mechanical)

The examination will focus on testing the fundamentals of mechanical engineering. The 6-hour examination will comprise two parts:

Format

• FEE Part 1 (Mechanical) (3 hours & 10 mins) – 40 MCQ questions

- ME 101 Control and Instrumentations
- ME 102 Dynamics and Vibrations
- ME 103 Fluid Mechanics
- ME 104 Mechanics and Materials
- ME 105 Manufacturing Technology
- ME 106 Thermodynamics and Heat Transfer

FEE Part 2 (Mechanical) (3 hours & 10 mins) – 5 out of 7 questions

- ME 201 Control and Instrumentations
- ME 202 Dynamics and Vibrations
- ME 203 Fluid Mechanics
- ME 204 Mechanics and Materials
- ME 205 Manufacturing Technology
- ME 206 Thermodynamics and Heat Transfer

Syllabus

• ME 101/201 Control And Instrumentations

Modelling of Linear Systems

Introduction to control systems. Mathematical modelling of electromechanical systems. Transfer functions representation of physical components. Block diagram manipulation.

Dynamic Response Analysis

Transient response analysis and performance indices. Poles and zeros concept, dominant pole concept of high order systems. Characteristic equation. Steady state errors and system types.

Principles of Feedback Control

Open loop versus closed loop control. Analysis of system type. Error elimination and disturbance rejection. Types of feedback systems. PID controller. Stability and Routh-Hurwitz method.

Root Locus Techniques

Qualitative analysis of the Root Locus. Guidelines for sketching a Root Locus. General concepts of dynamics compensator design. Design by Root Locus: PI, PD, PID, Lead and Lag compensators. Feedback compensation and realisation.

Frequency Domain Analysis

Concept of frequency response. Bode plots. Nyquist plot and Nyquist stability criterion. Stability margins. Closed loop frequency domain characteristics. Design of compensator via Bode plots - Lead, Lag & Lag-lead controller. Design examples.

Measurement System

Models and classification for measurement systems and their time and frequency domain behaviours. Performance specifications.

Analog Devices and Measurement

Introduction to basic measurement devices for analog signals and measurement principles. Conditioning of analog signals for transmission and processing.

Digital Devices and Measurement

Fundamental differences between analog and digital systems. Sampling theorem and fundamentals of data acquisition.

Sensors

Measurement for common engineering applications: position, speed, stress, strain, temperature, vibration and acceleration, pressure and flow. Semiconductor sensors and micromechanical devices.

ME 102/202 Dynamics And Vibrations

Dynamics

Kinematics of Particle

Uniform rectilinear motion; Uniform accelerated rectilinear motion; Rectangular components of velocity and acceleration; Motion relative to a frame in translation; Tangential and normal components; Radial and transverse components. Newton's second law; Equations of motion; Angular momentum of a particle; Principle of conservation of energy; Principle of conservation of momentum.

Kinematics of Rigid Bodies

General plane motion; Coriolis acceleration. Equations of plane motion for a rigid body; Angular momentum of a rigid body in plane motion; Principle of work and energy for a rigid body; Principle of impulse and momentum for the plane motion of a rigid body; Conservation of angular momentum.

Mechanical Vibrations

Vibration Without Damping

Simple harmonic motion; Energy method; forced vibration.

Damped Vibration

Damped free vibration; Damped forced vibration.

• ME 103/203 Fluid Mechanics

Basic concepts

Understanding fluids as compared to solids and gases. Properties of fluids: Density, pressure and viscosity. Pressure measurements. Buoyant forces and Archimedes' Principle. Stability of submerged and floating bodies. Stability of a ship.

Fluid Motion

Real and ideal fluids. Momentum and forces in fluid flow: Continuity equation, momentum equation, energy equation, Bernoulli's equation.

Pipe Flow

Laminar and turbulent flows in pipes. Moody diagram, losses and fittings, energy equation for real laminar flow in pipes. Equation of motion for turbulent flow. Mixing length hypothesis. Fully turbulent flow in pipes. Head and flow calculations in pump-piping systems.

Fluid Machinery

Fundamental theory and performance. Pumps and fans, turbines: Concepts and performance characteristics. Cavitation and surge phenomena.

Flow Resistance and Propulsion

Boundary layer, surface roughness, form drag. Water jet theory: Basic principle, fundamental thrust equation. Ship propulsion: Introduction to propulsion system, powering of ship, propeller theory, propeller-hull interaction.

ME 104/204 Mechanics And Materials

Material properties and behaviour

Yield and ultimate tensile stress, proof stress, elastic modulus. Yield and Strength failure criteria- Tresca and Von-Mises.

Temperature effects- temperature expansion coefficient, creep and stress relaxation. Post-yield effects- elastic-plastic, bilinear hardening and strain hardening. Fatigue effects- S/N curves.

Stress and Strain

Basic stress and strain for elastic bodies- direct stress and strain, shear stress and strain, Mohr's circle. Stress and Strain transformations - two and three-dimensional, 4 elastic constants E, v, k and G.

Bending of beams

Second moments of area of structural sections, Free body, shear force and bending moment diagrams. Elastic and inelastic bending of beams. Combined tension and bending of beams, Deflection and slopes of beams. Shear stress in beams, Statically indeterminate beams.

Bending of plates and cylindrical shells

Symmetric membrane bending theory of circular plates and shells under fixed and freely supported boundaries. Discontinuity stresses of cylinder to flat, cone or hemispherical shells junctions.

Torsion of prismatic bars and closed sections

Torsion of circular solid section and open thin-walled sections, shear stresses and deformation, shear flow in thin walled open and closed sections.

Buckling of columns

Euler buckling theory, perfect and imperfect columns, effect of end fixings on critical buckling loads.

Thermal loading

Thermal stresses in beams and cylinders due to a through thickness temperature gradient, thermal stresses in compound bars of different materials under uniform temperature.

Internal pressure loading

Membrane theory, thin and thick-walled cylinders under pressure.

• ME 105/205 Manufacturing Technology

Introduction

Cutting tool materials. Single and multi-point tools. Types of wear. Manufacturing processes: cold and hot working, rolling, extrusion, forging, sheet and metal blanking and forming, cold forming, welding, brazing, soldering, casting, powder metallurgy, plastics technology. Non-conventional machining: electro-discharge machining.

Metal Removal

Introduction to machine tools and machining operations – Generating motions of machine tools, machines using single point tools, machines using multipoint tools, machines using abrasive wheels. Mechanics of metal cutting – Chip formation, forces acting on the cutting tool and their measurement, the apparent mean shear strength of the work material, chip thickness, friction in metal cutting. Cutting tool materials – Major tool material types. Tool life and tool wear – Forms of wear in metal cutting. Economics of metal cutting operations – Choice of feed, speed and depth of cut, tool life for minimum cost and minimum

production time, estimation of factors needed to determine optimum conditions.

Metrology

Basic measuring instruments and their applications (Linear and angular measurement, roundness, flatness and surface finish measurement).

Manufacturing Processes

Introduction to cold and hot working. Rolling - 2, 3 and 4-high rolls, cluster and planetary rolls, manufacture of blooms, billets and slabs. Extrusion - Direct and indirect extrusion, hollow extrusion, hydrostatic extrusion. Forging - Hammer, press, roll forging, open and closed die forging. Sheet metal bending and deep-drawing, punch load, drawability, Crane's constants. Shearing of sheet metal - types of shearing operation, punch and die clearance, punch force. Cold forming processes - Marforming, Guerin process, hydroforming. Welding, brazing, soldering - Arc and gas welding, pressure welding, MIG, TIG, submerged-arc, friction, resistance, laser and electronbeam welding. Casting - Sand casting, patterns, defects, die-casting, centrifugal casting, investment casting, continuous casting. Powder metallurgy - Production of powders, fabrication processes, sintering, comparison with other processes. Electro-discharge machining. Plastics technology - Properties of plastics, thermoplastics and thermosets, manufacturing of plastics.

• ME 106/206 Thermodynamics And Heat Transfer

Thermodynamics

Fundamental concepts

Simple concept of thermodynamic system. Types of energy interaction between system and surroundings. Properties of simple pure substances –understand the general form of property diagrams. Empirical temperature scales and thermometry. Ideal and perfect gases. Use of steam tables for substance such as water.

First Law of Thermodynamics

The concept of fully-resisted or quasi-static processes; work and heat interactions in adiabatic boundaries with the introduction of internal energy, kinetic, potential and enthalpy. Statement of the First law of Thermodynamics: applications relating to non-flow and simple unsteady flow (e.g., the filing of a rigid vessel) processes. First law applied to simple thermodynamic plants, e.g. power plant, compressors and expanders (without detailed knowledge of plant construction). Steady flow energy equation and its application to demonstrate the significant of enthalpy changes.

Second Law of Thermodynamics

Alternative statements of the Second Law. Reversible and irreversible processes. Internal and external irreversibility. Heat engines operating in temperature reservoirs and the efficiency of reversible engines. Entropy as a property and its relationship to heat transfer. The Clausius inequality. Isentropic and non-isentropic processes.

Heat Transfer

Conduction

Heat transfer by conduction. Steady-state conduction through slab, compound walls, cylinders and spheres. Unsteady state conduction in homogeneous solids.

Convection

Heat Transfer by convection, in fluids and films. Overall heat transfer coefficients. Natural and forced convection on plane surfaces, fins, pipes and around round bundles. Heat transfer in extended surfaces- combining conduction and convection.

Radiation

Heat transfer by radiation. Laws of radiant heat transfer, black and gray bodies, geometric factors, absorptivity.

Recommended Reading List for Mechanical Engineering

• ME 101/201 Control And Instrumentations

Katsuhito Ogata, "Modern Control Engineering", 5th edition, published by Prentice Hall

• ME 102/202 Dynamics And Vibrations

F.B. Beer, E.R. Johnston, and W.E. Clausen, "Vector Mechanics for Engineers – Dyna,mics" S I version

• ME 103/203 Fluid Mechanics

B.R. Munson, D.F. Young, and T.H. Okiishi, "Fundamentals of Fluid Mechanics", published by John Wiley and Son F.M. White, "Fluid Mechanics", 7th edition, published by McGraw-Hill

ME 104/204 Mechanics And Materials

C. Ugural, "Mechanics of Materials", published by McGraw-Hill R.C. Hibbeler, "Mechanics of Materials", 2nd edition SI version, published by Prentice Hall

• ME 105/205 Manufacturing Technology

S. Kalpakjian, and Steven R. Schmid, "Engineering & Technology" W.A. Knight, and G. Boothroyd, "Fundamentals of Metal Machining and Machine Tools"

• ME 106/206 Thermodynamics And Heat Transfer


Y.A. Cengel, and M.A. Boles, "Thermodynamics: An Engineering Approach", 8th edition SI version, published by Mc-Graw Hill Incropera, and DeWitt, "Fundamental of Heat and Mass Transfer" J.P. Holman, "Heat Transfer", published by McGraw-Hill

Sample Questions for Fundamentals Of Engineering Examination Part 1 (Mechanical)

(Actual paper comprises 40 Multiple Choice Questions (MCQ) of 2.5 marks each. Answer all questions.)

- 1. Turbulence is a very important concept in fluid mechanics. Which of the following statement(s) on turbulence is(are) correct?
 - (i) Turbulence dissipates useful kinetic energy of flow to heat.
 - (ii) Turbulence increases the frictional drag.
 - (iii)Turbulence increases convective heat transfer.
 - (a) (i) and ii)
 - (b) (i) and iii)
 - (c) (ii) and iii)
 - (d) All of the above
- 2. A solid rectangular beam of 250mm depth is loaded by combined loading of bending moment and axial tensile force such that strain measurements showed that the top surface contracted by 200 microstrain and the bottom surface elongated by 500 microstrain longitudinally. Determine the position of the neutral axis (from the top surface) and calculate the axial stress caused by the tensile force and bending stress caused by the bending moment independently. E = 200GPa.
 - (a) 71.43mm, 30MPa, 200MPa
 - (b) 125mm, 150MPa, 150MPa
 - (c) 125mm, 30MPa, 200MPa
 - (d) 178.57mm, 30MPa, 200MPa
- 3. A hollow circular section steel rod 300mm long and internal and external diameter of 10mm and 16mm respectively is used as a torsional spring by having one end fixed and the other end free to twist. Determine the torsional twist in degrees of the resulting spring when a torque around the rod axis of 100 Nm is applied. Material G= 80 GPa. (Hint: use thick wall formula)
 - (a) 5.33 °
 - (b) 3.94 °
 - (c) 1.55 °
 - (d) 7.43 °

- 4. Inclusions may sometimes be found in steels of different compositions. These inclusions:
 - (a) are sites for potential initiation of cracks
 - (b) are invisible to naked-eye inspections of the steel pieces
 - (c) may be significantly reduced through costly special processes
 - (d) All of the above
- 5. A 21 g bullet hits a 2 kg block that is initially at rest as shown in the figure below. After the collision, the bullet becomes embedded in the block, and they slide a distance of 0.31 m. If the coefficient of kinetic friction between the block and the ground is $\mu k = 0.7$, determine the preimpact speed of the bullet.



- (a) 198.5 m/s
- (b) 251.2 m/s
- (c) 351.5 m/s
- (d) 405.2 m/s
- 6. A high-speed rail transportation system has a top speed of 100 m/s. For the comfort of the passengers, the magnitude of the acceleration and deceleration is limited to 2 m/s2. Determine the minimum time required for a trip of 100 km.
 - (a) 0.30 hr
 - (b) 0.25 hr
 - (c) 0.17 hr
 - (d) 0.25 hr
- 7. If the characteristic equation of the closed loop system is $s^2 + 3s + 2 = 0$, then the system is:
 - (a) Over damped
 - (b) Critically damped
 - (c) Under damped
 - (d) Unstable

- 8. In a cyclic process, the net change of internal energy is:
 - (a) Equal to zero
 - (b) Equal to one
 - (c) Greater than one
 - (d) Smaller than one
- 9. In an adiabatic process, which of the above statements are correct?
 - (i) the temperature change is zero.
 - (ii) the change in internal energy is zero,
 - (iii) the heat interaction between system and the surroundings is zero,
 - (iv) the process is carried out very rapidly.
 - (a) All of the above
 - (b) (i), (ii) and (iii)
 - (c) (i), (ii) and (iv)
 - (d) (iii) and (iv)
- 10. Which of the following statements is correct?
 - (a) Tool life increases with the increase of cutting speed
 - (b) Tool life decreases with the increase of cutting speed
 - (c) Cutting speed has no influence on tool life
 - (d) None of the above

Sample Questions for Fundamentals Of Engineering Examination Part 2 (Mechanical)

(Actual paper comprises 7 questions. Answer 5 questions.)

Q1.

Two reservoirs A and B are connected by a pipeline which is 100 mm in diameter for the first 10 m and 150 mm in diameter for the remaining 20 m. The entrance from and exit to the reservoir are sharp, and the expansion from the 100 mm to 150 mm diameter pipeline are sudden. The water surface of the upper reservoir A is 10 m above that of the lower reservoir B.

(a) Tabulate the losses of head that occur and calculate the discharge flow rate from reservoir A to reservoir B.

(10 marks)

(b) Draw the hydraulic gradient and total energy gradient along the pipeline between the two reservoirs.

(5 marks)

- the mass flow rate of air in the gas turbine cycle if the steam generation rate is 30 kg/s,
- (ii) the rate of total heat input, and
- (iii) the thermal efficiency of the combined cycle.

State all assumptions made in the solution.

(16 marks)

- (c) What is the difference between total energy line and hydraulic gradient line? (2 marks)
- (d) What is the difference between total energy line and hydraulic gradient line? (3 marks)

The Darcy-Weisbach equation for frictional head loss h_f along a pipe is

$$h_f = 4f \frac{l}{d} \frac{V^2}{2g}$$

where f is friction factor, V is velocity of flow in pipe, I is length, d is diameter and g is gravity.

You may take f = 0.01 for the pipes, $g = 9.81 \text{ m}^2/\text{s}$, density of water $\rho = 1000 \text{ kg/m}^3$, atmospheric pressure $P_a = 101 \text{ kPa}$, the entrance and exit loss coefficients from and to the reservoir as 0.5 and 1 respectively. The expansion loss from pipe 1 to pipe 2 is given by

$$\left[1-\frac{A_1}{A_2}\right]^2 \frac{V_1^2}{2g}$$

where A_1 and A_2 are areas of pipe 1 and 2 respectively, and V_1 is the velocity in pipe

Q2.

In the figure below, a motor drives a stepped shaft which are attached two pulleys A and B which are connected to machine loads. The torques to drive the loads at the pulleys, Ta and Tb are equal and exerted in the same direction. The motor is outputting a power of 300 KW and shaft speed is 3000 RPM.

(a) Calculate the torques at sections OA and AB.


(4 marks)

(b) Assuming the shaft sections OA and AB are circular and solid, and the maximum allowable material shear stress is 110 Nmm-2, calculate the minimum diameters of each section.

(8 marks)


(c) To reduce the cost of machining the step, and while retaining the same material, it is decided that hollow circular sections be used while keeping the outer diameter constant at 40mm for the whole length. Calculate the minimum internal diameters of sections OA and AB. Recommend a common shaft inner diameter to satisfy both sections.

(8 marks

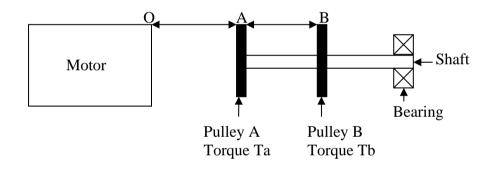

Q3.

If mA = 10 kg, mB = 40 kg, and the coefficient of kinetic friction between all surfaces is $\mu k = 0.11$, what is the acceleration of B down the inclined surface?



Q4.


Two thin sheets of 0.4 wt% C plain carbon steel are held together by an aluminium alloy rivet. List the possible types of corrosion that might arise. Suggest how corrosion might be minimized in such a situation.

(20 marks)

Q5.

It is desired to have a car of mass 1,000 kg go up the inclined plane shown in the figure below at a constant speed of 90 km/hr. The car is initially at rest. Design a controller that will output F that pushes the car up the inclined plane to maintain the car at the desired constant speed.

State any assumptions or requirements to ensure the controller works well.

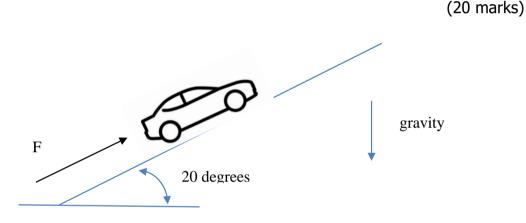

Q6.

A 750-MW steam power plant burns fuel of calorific value 44 MJ/kg and generates electricity. The boiler operates at 560oC and the condenser releases waste heat at 300C. Calculate the minimum daily fuel consumption of the plant.

$$\begin{array}{l} \mbox{Minimum fuel concumption implies Carnot efficiency.} \\ \eta_c = 1 - \frac{T_L}{T_H} = 1 - \frac{(30 + 273)}{(560 + 273)} = 0.636 \\ \mbox{Heat input to plant, } Q = \frac{W}{\eta_c} = \frac{750}{0.636} = 1195 \ \mbox{MW} \\ \mbox{Mass flow rate of fuel, } \dot{m} = \frac{Q}{CV} = \frac{1195}{44} = 27.16 \ \mbox{kg/s} \\ \mbox{Daily minimum fuel consumption, } m = 27.16(24 \ x \ 3600) = 2.347 \ x \ 10^6 \ \mbox{kg} \\ \end{array}$$

Q7.

Steel bar stocks of 200 mm length and 90 mm diameter is to be used for machining a shaft of 160 mm lwngth and 80 mm diameter using a lathe of 10 KW motor running at an efficiency of 80%. The machining time given for both roughing and finishing operations should not exceed 15 min. The specific cutting energy ps, for the work material is 2.73 GJ/m3, and the time taken to load and unload a workpiece is 2 min.

Select proper cutting conditions, tool materials and type of rake angles for both roughing and finishing operations.

IV Fundamentals Of Engineering Examination (Chemical)

The examination will focus on testing the fundamentals of chemical engineering. The 6-hour examination will comprise two parts:

Format

- FEE Part 1 (Chemical) (3 hours & 10 mins) 40 MCQ questions
- FEE Part 2 (Chemical) (3 hours & 10 mins) 5 out of 7 questions

Syllabus

• ChE 101: Chemical Engineering Principles

Mass balances

Unit conversion, process flow chart, phase behavior, composition, purge, bypass, reactive systems, multiple reactions, recycle, combustion.

Energy balances

Heat capacity, Latent heat, heat of reaction, heat of solution.

• ChE 102: Thermodynamics

- **Thermodynamic properties and phase diagrams** Enthalpy, entropy, free energy, steam tables.
- Thermodynamic laws and applications
 First law, Second law, isothermal processes, adiabatic processes, cyclic processes (e.g. power cycles, refrigeration).
- **Chemical thermodynamics** Phase equilibrium, chemical equilibrium, heats of reaction and mixing.

• ChE 103: Transport Processes

Momentum transfer

Classification of fluids and their properties. Continuity equation. Momentum balance equation. Bernoulli equation. Flow of compressible fluids. Friction losses in flow. Equivalent diameter for non-circular conduct. Pumps and Compressors: characteristics curves, net positive suction head (NPSH), cavitation, and selection of pumps and compressors.

Heat transfer

Basic definitions. Steady state heat conduction. Thermal resistor models for composite walls. 1-D analysis of unsteady state heat conduction. Natural and forced convection. Heat exchangers. Black body radiation and calculation of energy loss from surface.

Mass Transfer

Fick's laws. Estimation of gas and liquid phase diffusivities. Steadystate and unsteady state diffusion. Pore diffusion. Convective mass transfer – calculations of fluxes and mass transfer coefficients. Mass, heat and momentum transfer analogies.

• ChE 104: Chemical Reactors

Kinetics versus thermodynamics of chemical reactions. Reaction rates. Rate laws. Reaction stoichiometry versus reaction mechanism. Stoichiometric table analysis. Ideal reactor design equations. Analysis of reaction rate data. Reactor selection and sequencing. Yield versus productivity in multiple reactions. Non-isothermal operations. Residence time distributions as reactor diagnostics. Coupling of transport processes to chemical reactions. Reactors for heterogeneous catalysis.

<u>ChE 105: Separation</u>

Phase equilibrium, partition coefficient, driving force and mass transfer rate in the context of separation processes. Mass and energy balances around flash distillation, multi-stage distillation, absorption and stripping, and liquidliquid extraction and membrane processes. Equilibrium and rate based design concepts of these separation processes for binary and multi-component systems. Effects of various operating variables on the separation process output, troubleshooting and process improvement.

<u>ChE 106: Process Control</u>

Importance of process control in chemical process industry. Architecture and hardware of a control system. Measurement noise and observability of a process variable. Dynamic behavior of a chemical process (first order, second order, dead time, recycle, etc.), and various types of open loop and closed loop responses. Types of control systems (feedback, feed forward, cascade, ratio, etc.) and their selection for a given application. Design/tuning of industrially relevant feedback controllers and their stability. Unit level (reactor, distillation column, etc.) versus plant wide control.

<u>ChE 107: Process Design & Safety</u>

 Need for process simulation, design, and optimization. Plant life cycle and plant design stages. Fundamentals of process simulation, process simulators and their architecture. Hierarchical approach to preliminary process synthesis. Heat integration. Process diagrams. Process optimization. Equipment selection, specification, sizing and costing. Time value of money. Plant cost estimation and profitability analyses (payback period, NPV, RORI, ...).

 Importance of occupational health and loss prevention. Hazards, risks, and incident statistics. Toxic hazards, threshold limit values; Probit analysis. Industrial hygiene evaluation and control. Toxic release estimation, consequence analyses, and exposure limits. Fires and explosions, flammability and limits, and fire/explosion prevention. Relief systems and sizing. Hazard identification and risk assessment.

Recommended Reading List for Chemical Engineering

ChE 101: Chemical Engineering Principles

1) R. M. Felder, R. W. Rousseau and L. G. Bullard, "Elementary Principles of Chemical Processes" 4th edition (2015), John Wiley and Sons, Inc.

ChE 102: Thermodynamics

1) J. M. Smith, H. Van Ness, M. Abbott and M. Swihart, "Introduction to Chemical Engineering Thermodynamics" 8th edition (2018), McGraw-Hill.

ChE 103: Transport Processes

1) WELTY J.R., RORRER G. & FOSTER D.G. (2015) *Fundamentals of Momentum, Heat, and Mass Transfer, International Student Version*, 6th Edition. Publisher John Wiley & Son, New York.

ChE 104: Chemical Reactors

- 1) Octave Levenspiel, *Chemical Reaction Engineering*, 3rd Edition (1999), John Wiley and Sons.
- 2) H Scott Fogler, *Elements of Chemical Reaction Engineering*, 4th Edition (2006), Prentice Hall International Series.

ChE 105: Separation

- 1) Philip C. Wankat, *Separation Process Engineering*, 5th Edition (2023), Pearson Education International.
- 2) J D Seader and Ernest J Henley, *Separation Process Principles*, 2nd Edition (2006), John Wiley and Sons, Inc.

ChE 106: Process Control

- 1) Dale E Seborg, Thomas F. Edgar, Duncan A. Mellichamp and Francis J Doyle III, *Process Dynamics and Control*, 4th Edition (2016), John Wiley and Sons, Inc.
- 2) George Stephanopoulos, Chemical Process Control: An Introduction to Theory and Practice, Paperback Edition (2015), Pearson Education International.

ChE 107: Process Design & Safety

- 1) Ray Sinnott and Gavin Towler, *Chemical Engineering Design*, 5th Edition (2009), Elsevier (Butterworth & Heinemann).
- 2) R Turton, R C Bailie, W B Whiting, J A Shaeiwitz, D Bhattacharya, *Analysis, Synthesis, and Design of Chemical Processs*, 4th Edition (2013), Pearson Educational International.
- 3) D Crowl and J F Louvar, *Chemical Process Safety: Fundamentals with Applications*, 2nd Edition, Prentice Hall, 200

Sample Questions for Fundamentals Of Engineering Examination Part 2 (Chemical)

(Actual paper comprises 40 Multiple Choice Questions (MCQ) of 2.5 marks each. Answer all questions.)

1. A distillation column strips ethanol from a feed of 3 mol% ethanol in water. The feed rate is 16000 mol/h. The distillate contains 87 mol% ethanol, and the bottoms contains 0.05 mol% ethanol. What is the flow rate of the distillate?

(a) Cannot be calculated
(b) 321 mol/h
(c) 432 mol/h
(d) 543 mol/h

- 2. One mole of ideal gas at 26°C undergoes isothermal compression from 0.5 bar to 2.5 bar. What is the work done on the gas?
 - (a) 350 J
 - (b) 1950 J
 - (c) 3000 J
 - (d) 4000 J
- 3. The vapour-pressure data for benzene is given in the table below:

Pressure (mmHg)	Temperature (°C)
40	7.6
80	21.6

Use the data given to estimate the latent heat of vapourization of benzene.

- (a) 33.8 kJ/mol (b) 67.6 kJ/mol (c) 94.5 kJ/mol (d) 113 kJ/mol
- 4. Which of the following governs the diffusion of one species onto another?
 - (a) Fourier's Law
 - (b) Fick's Law
 - (c) Euler's Law
 - (d) Reynolds Number

5. Steam reforming of methane (SRM) is a high temperature (700-1000C) catalytic reaction for producing hydrogen by splitting water. The product is a mixture of CO and H2 generally known as the synthesis gas.

$$CH_4 + H_2O \rightarrow CO + 3H_2 \tag{1}$$

The water-gas shift (WGS) reaction also occurs under the steam reforming conditions.

$$CO + H_2O \to CO_2 + H_2 \tag{2}$$

Which of the following statements is correct for maximizing hydrogen production?

- (a) The water-gas shift reaction is always desirable.
- (b) The water-gas shift reaction is always undesirable.
- (c) The water-gas shift reaction is desirable only if methane is in excess.
- (d) The water-gas shift reaction is desirable only if steam is in excess.
- 6. Which one of the following separation methods is the preferred current option for capture and concentrate of CO₂ from a power plant flue gas?
 - (a) Multi-stage distillation
 - (b) Extraction
 - (c) Absorption
 - (d) Flash distillation
 - (e) Ion exchange
- 7. What type of control system has been implemented in the heating process in Figure Q6?
 - (a) Feedback control
 - (b) Ratio control
 - (c) Cascade control
 - (d) Feed forward control
 - (e) Model predictive control

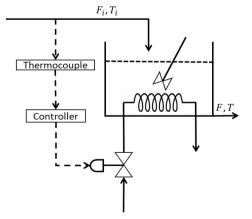


Figure Q6: Controlling temperature in a tank

- 8. What is the role of a fluid property package in a process simulator such as Aspen Hysys or Aspen Plus?
 - (a) Estimate reaction related properties such as rate/equilibrium constants
 - (b) Perform mass and energy balances
 - (c) Estimate thermophysical properties of streams
 - (d) All of the above
- 9. A worker was exposed to 85 dBA for 2 hr, 90 dBA for 2 hr, and 95 dBA for 2 hr. Calculate the worker's combined exposure and determine if his noise exposure is within permissible limit. Given the following permissible noise exposure,
 - Noise at 85 dBA, Maximum Exposure Limit: 16 hr
 - Noise at 90 dBA, Maximum Exposure Limit: 8 hr
 - Noise at 95 dBA, Maximum Exposure Limit: 4 hr

Which of the following is correct?

- (a) Combined exposure of 0.58, overexposed
- (b) Combined exposure of 0.68, overexposed
- (c) Combined exposure of 0.78, within exposure limit
- (d) Combined exposure of 0.88, within exposure limit
- 10. An explosion blast is estimated to be equivalent charge weight of 6,120 kg of trinitrotoluene (TNT). What are the estimated peak side-on overpressures at 100 m and 500 m from ground-zero.
 - (a) 50.7kPa, 7.1kPa
 (b) 50.7kPa, 8.1kPa
 (c) 60.7kPa, 7.1kPa
 (d) 60.7kPa, 8.1kPa

Sample Questions for Fundamentals Of Engineering Examination Part 2 (Chemical)

(Actual paper comprises 7 questions. Answer 5 questions.)

Q1.

A two-stage adiabatic reactor is used to produce ammonia from nitrogen and hydrogen. The single pass conversion in the first stage is 20%. Products from this stage are mixed with fresh feed containing 25 mol% N2 and 75 mol% H2 at 50 °C to produce a mixture at 400 °C. This mixture then enters the second stage reactor and the product exits at a temperature of 500 °C. The product from the second stage reactor is cooled in heat exchanger E before entering a condenser. At the condenser, all the ammonia and a small amount of nitrogen and hydrogen are removed as product P. The remaining nitrogen and hydrogen are heated up to 400 °C (using the product stream from the second stage reactor) in heat exchanger E and are then recycled to the first stage reactor as feed.

Sketch the process flow diagram, calculate the single pass conversion in the second stage reactor and the overall conversion.

The following data can be used in your calculation: $N_2(g)$: $C_p = 29 \text{ J/mol-}^{\circ}C$ $H_2(g)$: $C_p = 29 \text{ J/mol-}^{\circ}C$ $NH_3(g)$: $C_p = 40 \text{ J/mol-}^{\circ}C$

The standard enthalpy of reaction is:

 $N_2(g) + 3H_2(g) \rightarrow 2NH_3(g) \quad \Delta H_r(400^{\circ}C) = -106 \, kJ/mol$

(20 Marks)

Q2.

A steam power plant operates on the Rankine cycle. Steam enters the turbine at 8 MPa and 600 °C. The pump and turbines are isentropic. Steam exits the condenser as a saturated liquid at a pressure of 10 kPa. Cooling water at 1500 kg/s and 20 °C is used to remove heat from the condenser. The net power output of the power plant is 52 MW.

Determine the thermal efficiency of the cycle, the mass flow rate of steam, and the exit temperature of the cooling water.

Q3.

A centrifugal pump is used to transport a liquid (density: 820 kg/m³, viscosity: 0.01 Pa s) from tank A to tank B. Tank B is at a higher elevation than tank A with a free surface height difference of 7 m. The connecting pipe of internal diameter 10 cm is 15 m long with two bends. The Darcy friction factor is:

 $f = 0.316 Re^{-1/4}$

where Re is the Reynolds number. The dimensionless equivalent length of each bend is 30. The mass flow rate is 100 kg/s.

- (a) Determine Re inside the pipe.
- (b) Determine the hydraulic power of the pump.

(15 marks)

(5 marks)

Q4.

A 100 L (L = Liter) PFR is currently used to process the gas phase reaction $A \rightarrow R$ to

90 % completion. Marketing is forecasting a 10 % increase in the demand for R (at the same purity) in the coming months. An idling CSTR of 40 L is available for redeployment. It is suggested that the production increase be handled by this CSTR connected in parallel with the PFR. Will this work? What about connecting the CSTR in series with the PFR? Please explain if the series arrangement is superior to the parallel arrangement (no calculation needed).

Available kinetics information: first order reaction, $-r_A = kc_A$

(20 marks)

Q5.

Figure Q5 is the schematic of a multi-stage distillation process to purify a solvent from its aqueous mixture. The boiling point of the solvent is 56 °C. The corresponding McCabe Thiele diagram is also shown in the same figure. The feed is a saturated liquid and contains 45 mol% solvent. It enters the column at a flowrate of 1,000 kmol/hr. Mole fractions of the solvent in the top and bottom products are 96 mol% and 2.5 mol%, respectively. The distillation column operates at atmospheric pressure and uses a total condenser and partial reboiler. The column has L/D = 1.4. The latent heat of evaporation of water at 100 °C is 40,680 kJ/kmol. Heat supplied to the reboiler comes from burning natural gas. The heat of combustion of natural gas is 800 kJ/mol.

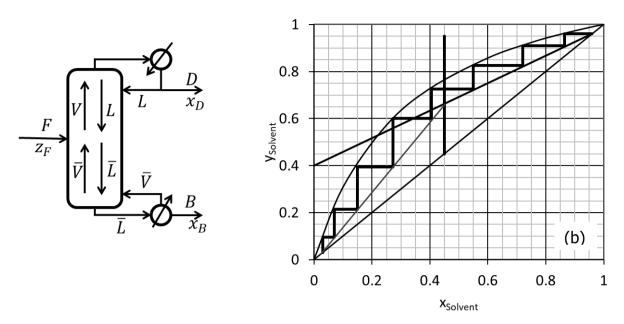


Figure Q5: (a) Schematic of a multi-stage distillation process for separating a pharmaceutical solvent from water by distillation and (b) McCabe Thiele diagram for the process.

- (a) What are the (approximate) temperatures of the condenser and the reboiler? (5 marks)
- (b) Calculate the distillate flow rate.

Calculate the boil up ratio, $\frac{V}{P}$.

- (5 marks)
- (5 marks)
- (d) Calculate the CO₂ emissions due to the heat duty of the reboiler.

(5 marks)

Q6.

(c)

A single-tank process has been operating for a long period of time with inlet flow rate of $q_i = 30.4 \text{ m}^3/\text{min}$. After the operator increases the inlet flow rate by 10 % at t = 0, the level of water in the tank changed as shown in the Table below. The data is also plotted for your information.


(a) Determine the transfer function for the process. Are there any shortcomings of the approach you used?

(12 marks)

(b) Use the model to design a PI-controller for the process with an effective controller design method of your choice.

(8 marks)

t (min)	h (m)	t (min)	h (m)
0	5.50	1.4	6.32
0.2	5.51	1.6	6.37
0.4	5.75	1.8	6.40
0.6	5.93	2.0	6.43
0.8	6.07	3.0	6.45
1	6.18	4.0	6.50
1.2	6.26	5.0	6.51

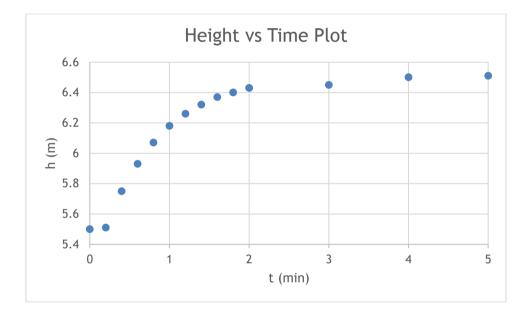

Q7.

Lethanol Indonesia Pte Ltd is considering a project to produce 100 million liters (*L*) of bioethanol per year from the abundant lignocellulosic biomass in Indonesia. You are tasked to provide a recommendation on its profitability.

Constructing a plant for bioethanol will take one year. The plant will then run for 10 years and will have no salvage value at the end. Plant construction will cost \$1 per L of production capacity. Lethanol will allocate the capital investment from its own budget at the start of plant construction. For the first year of operation, it is estimated that biomass feedstock will cost 30 cents per L of bioethanol, bioethanol can be sold for 50 cents per L, and the plant will incur \$5 million in other operating expenses. Lethanol uses a discount rate of 10% for the time value of money. Indonesia projects its inflation to be 3 % per annum during the plant's life. Its corporate tax rate is 20 % and depreciation is computed via the straight-line method. The start of the plant's construction will be used as time zero for the economic analysis.

(a) What is inflation? Is it any different from interest rate? Explain.

(3 marks)

(b) For the 4th year of plant's operation, compute the following.

(i) To	tal revenue	
	tal production costs	(2 marks)
(ii) To	tal production costs	(3 marks)
(iii) De	epreciation	(1 mark)
(iv) Ta	xes	
(vi) To	tal cash flow	(4 marks)
		(2 marks)
(vii) Dis	scounted cash flow	(2 marks)
		(= marito)

(c) Explain how you will compute NPV (Net Present Value) and provide a recommendation for this project. (Actual calculations are NOT needed)

(3 marks)